

## Testing and Technical Service Office

366 Greif Parkway  
Delaware, Ohio 43015  
Phone: 740-657-6565  
Fax: 740-657-6978



May 24, 2016

### UNITED NATIONS/IMO/DOT PERFORMANCE TEST

<b>Test Type:</b>	Annual Retest	<b>Report No:</b>	S-1305-AL-050416
<b>Plant:</b>	Alsip, IL, 4300 W. 130th St.	<b>Test Date:</b>	5/4/2016
<b>Drum Code:</b>	SB160SBN999*****4FSXXY1.8/100	<b>Expiration Date:</b>	5/4/2017

Mr. Tim Seymour,

Attached are the laboratory test result sheets of the UN/DOT Performance Test on the steel drums that was conducted at the above stated plant.

These sample containers that were made with the proper components passed the required drop, leakproofness, hydrostatic and compression tests for the following UN Marking(s):

1A2/Y1.8/100/YR

1A2/Z1.8/100/YR

Thank you and best regards.

A handwritten signature in black ink, appearing to read "Jordan Brodsky". The signature is written in a cursive style with a horizontal line underneath.

Jordan Brodsky

JB:jb

Director Product Technical and Regulatory Support

TESTING and TECHNICAL SERVICE OFFICE

UNITED NATION/IMO/DOT  
PERFORMANCE TEST



Date Tested: 5/4/2016  
Report #: S-1305-AL-050416  
Design Qualification Date: 7/17/2007  
Closure Notification: See Attached

RETEST DESIGN TYPE RESULT SHEET

Drum Style Steel Drum Open Head UN Code: 1A2 Packing Group II

GBC Code / Drum Type: SB160SBN999\*\*\*\*\*4FSXXY1.8/100 / OPEN HEAD BOLT RING

Dimensions: I.D.: 355.600 MM / 14 In. O.H.: 690.700 MM / 27.1875 In.

UN Certified Markings: 1A2/Y1.8/100/YR USA/GBC 1A2/Z1.8/100/YR USA/GBC USA/GBC

Maximum Capacity: 63.6 Litres / 16.8 Gallons  
Capacity Range: 37.9 - 60.6 Litres / 10 - 16 Gallons  
Test Mass - Gross: 71.7 KG / 158.2 Lbs.  
Tare: 8.2 KG / 18.0 Lbs.  
Net: 63.6 KG / 140.2 Lbs.

Package Preparation: Drums filled with water to a minimum of 98%.

Conditioning: Not Applicable

Drop Tests (49 CFR 178.603)

Drop Height: 1.80 Metres / 70.87 Inches  
Results Diagonal Top Drop: **3 Drums Passed**  
Results Diagonal Bottom Drop: **3 Drums Passed**

Vibration Test (49 CFR 178.608)

Capable of withstanding, without rupture or leakage, the vibration test procedure in 49 CFR 178.608.

Leakproofness Test (49 CFR 178.604)

Air Pressure Applied: 3 psi  
Results after 5 minutes: **3 Drums Passed**

Hydraulic (Hydrostatic) Test (49 CFR 178.605)

Internal (Hydraulic) Pressure: 100 kPa for a period of 5 minutes  
Results: **3 Drums Passed**

Static Compression Test (49 CFR 178.606)

Total Mass: 409.09 KG ( 4.4 Drums x 120.3 KG each )  
Duration: 24 Hours  
Results: **3 Drums Passed**

TEST RESULTS CERTIFIED BY: **GREIF TESTING and TECHNICAL SERVICES**

This test report is the property of Greif. The know-how, methods and techniques disclosed in this report are confidential information which can only be used by those persons with specific written authorization from Greif.

Jordan Brodsky  
Director, Product Technical and Regulatory Support

**UN / IMO / DOT PERFORMANCE TEST  
ADDITIONAL DRUM INFORMATION**



**Report #** S-1305

<b>Closing Ring:</b>	<u>12ga Bolt Ring</u>	<b>Necked-In:</b>	<u>Yes</u>
<b>Chime Bands:</b>	<u>None</u>	<b>Tapered:</b>	<u>No</u>
<b>Cover Gasket:</b>	<u>EPDM Solid</u>	<b>Agitator:</b>	<u>No</u>
<b>Number of Hoops:</b>	<u>2 or more</u>	<b>Other:</b>	<u>None</u>
<b>Bottle / Liner:</b>	<u>None</u>		

**Fittings:**

<b>Brand:</b>	<b>Size:</b>	<b>Flange:</b>	<b>Plug:</b>	<b>Plug Gasket:</b>	<b>Location:</b>
American Flange	2"	Steel	Steel	Buna	Cover
American Flange	3/4"	Steel	Steel	Buna	Cover
American Flange	2"	Steel	Nylon	Poly Irradiated	Cover
American Flange	3/4"	Steel	Nylon	Poly Irradiated	Cover

**Notes:**

- 1) This information reflects only the components of the sample drums tested and may not reflect all equivalent components of the drums covered under this test.
- 2) See attached closure notification for torque values for applicable rings and plugs on test drum.
- 3) If torque for components are not included on the closure attached, the components are customer supplied and were used for testing. Proper closing of the drum is the responsibility of the shipper.

## \*\*\*\*\* CLOSURE NOTIFICATION \*\*\*\*\*

Pursuant to the requirements of the Department of Transportation in CFR 49 Part 178.2(c)(1), this is your notification of the closing method used for the the containers sold to you.

These instructions for closure are based upon the closure methods used to enable these containers to pass the United Nations test requirements as outlined by the UN marking on the package. This method of closure should be used to ensure that your containers have been closed in the same manner as when they were initially tested. To be UN certified, this drum must be closed with the same cover, closing ring, gasket and plugs (if applicable) used for certification. If the drum is purchased without these parts, contact the supplying Greif plant for the correct components.

Your product may adversely affect container materials, bung threads or closing devices. Product compatibility with the container is the shipper's responsibility.

The closure recommendations do not take into account any hazards present at your facility, or the handling, filling or shipping of your product.

Any container used for packaging hazardous materials should be inspected before filling and shipment. Containers with obvious damage or deterioration should not be filled or shipped.

Ring Closing Instructions:

- 1) Place cover on the drum, making sure that the gasket is in place.
- 2) Snap the closing ring over the cover and top lip of the drum. Make sure that the ring's lugs point down below the ring. Also, make sure the bottom edge of the closing ring engages under the lip of the drum.
- 3) Insert the bolt completely through the lug without threads. Next, screw on the jam nut if included. Finally screw the bolt into the threaded lug.
- 4) While tightening the bolt, tap along the entire perimeter of the ring with a mallet, starting directly across from the bolt.
- 5) Tighten the bolt according to the manufacturer's recommended torque and gap listed below. The cover and ring should not spin, and the free ends of the ring should not touch.
- 6) If used, tighten the jam nut or locking nut against the lug without threads. This prevents the bolt from backing out of the closing ring.

Plug Closing Instructions:




- 1) Place the plugs into the appropriate bung.
- 2) Turn the plug gently clockwise, making sure that the plug is entering the bung properly.
- 3) Using a torque wrench, tighten the plug according to the manufacturer's recommended torque below.

Drums with rings and plugs closed in this manner have met the UN performance requirement as specified in the container markings.

For Item # SOH10340

Closing Ring	Torque	Gap
12ga Bolt Ring with EPDM Gasket	60 ft-lbs	1/8" to 5/8"
<b>Plugs</b>		
American Flange 2" Steel with Buna	15 to 22 ft-lbs	
American Flange 3/4" Steel with Buna	8 to 15 ft-lbs	
American Flange 2" Nylon with Poly Irradiated	15 to 22 ft-lbs	
American Flange 3/4" Nylon with Poly Irradiated	8 to 11 ft-lbs	

ASSEMBLY DESCRIPTION	ACT. CAP. GAL.	DIMENSIONS					REMARKS	CUBIC CONTENT		PRODUCING PLANTS			
		A	B	C	D	E		INT.	OCEAN CUBE	ALS	FDN	LPT	STD
B100SBR	10.60	17	16				FOR DRUM WEIGHTS SEE DRUM REFERENCE BOOK  SPECIFY OPENINGS BY CODE LETTER PER. DWG. DA-98	1.42	2.21	1		1	
B130SBR	13.50	21 1/4	20 1/4			1.80		2.73	1				
B150SBR	15.40	24 1/4	23 1/4			2.06		3.13	1		1		
B160SBR	16.90	26 1/2	25 1/2			2.26		3.52	1		1		

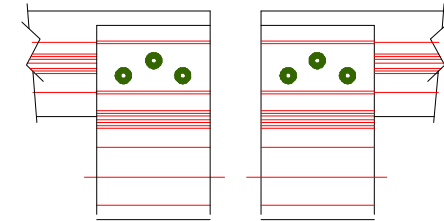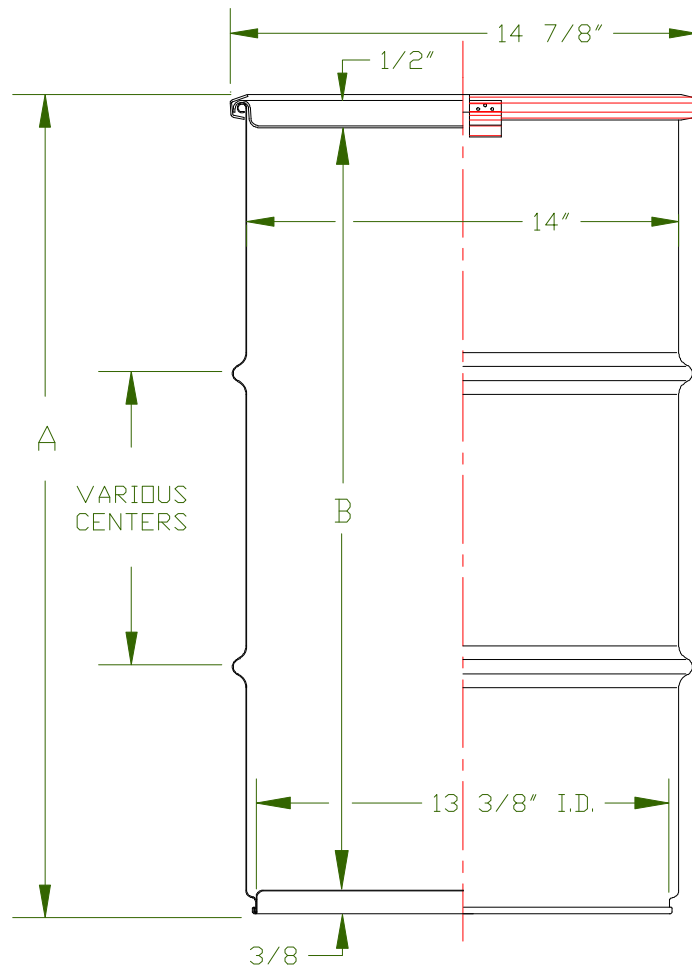

**GREIF**

14" DIA. OPEN HEAD  
BOLT RING DRUM, WITH  
NECKED-IN BOTTOM

DATE 08/28/02  
AS-BSBN1

# Test Result Photographs

